

PRODUCT CATALOGUE AUSTRALIA



Valid from 1 September 2022



... and the insulation
is perfect



... and the insulation
is perfect

Pro Clima Australia Pty Ltd


Web: www.proclima.com.au

Email: welcome@proclima.com.au

Phone: 1800 PRO CLIMA (776 254)


    : pro clima AUS

Purchase pro clima products from one
of our distributors across Australia!



We are the building envelope experts

Our weather resistant and airtight systems create healthy, durable and energy efficient buildings. Whether you want to achieve safety and comfort or reduced energy costs, we're here to help.

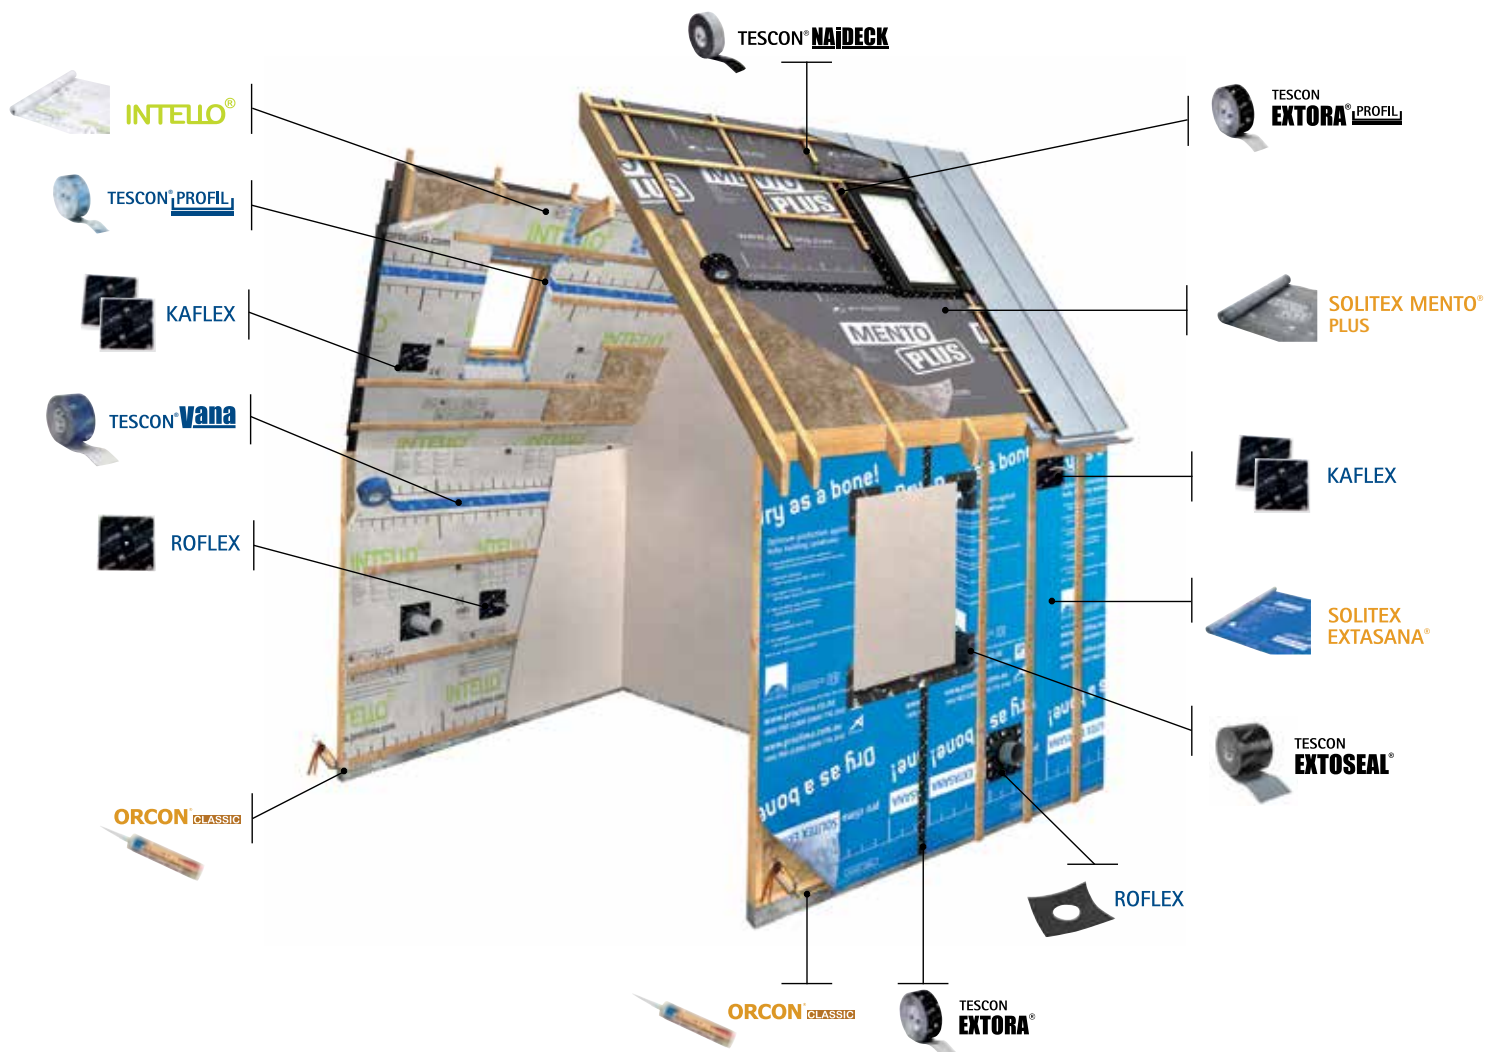



Contents

Weather Resistive Barriers (WRB) 06

| | |
|--------------------------|----|
| SOLITEX EXTASANA® | 06 |
| SOLITEX EXTASANA ADHERO® | 08 |
| SOLITEX MENTO® PLUS | 10 |
| SOLITEX MENTO® 5000 | 12 |
| SOLITEX MENTO® ULTRA | 13 |
| SOLITEX® UM connect | 14 |
| DA | 16 |

Intelligent Air Barriers (IAB) 18

| | |
|-------------------|----|
| INTELLO® PLUS | 18 |
| INTELLO® conneX | 20 |
| AEROSANA® VISCONN | 21 |

Adhesives, Tapes & Accessories 22

| | |
|----------------------------------|----|
| TESCON EXTORA® | 22 |
| TESCON EXTORA® PROFIL | 22 |
| TESCON EXTOSEAL® | 23 |
| TESCON® NAIDECK mono patch | 23 |
| TESCON® NAIDECK | 24 |
| CONTEGA® EXO | 24 |
| CONTEGA® IQ | 25 |
| CONTEGA® PV | 25 |
| TESCON® VANA | 26 |
| TESCON® PROFIL | 26 |
| DUPLEX | 27 |
| TESCON® WS | 27 |
| PRESSFIX | 28 |
| RESSFIX XL | 28 |
| ORCON® CLASSIC | 29 |
| TESCON® PRIMER RP | 29 |
| INSTAABOX | 30 |
| KAFLEX mono/duo | 30 |
| KAFLEX multi | 31 |
| KAFLEX post | 31 |
| ROFLEX 20 | 32 |
| ROFLEX 30/50/100/150/200/250/300 | 32 |

100 Year Adhesion & Certifications 33

Pricing 34

Contact 36





SOLITEX EXTASANA®

Wall Weather Resistive Barrier

- ✓ 180 days UV resistance & long-term durability
- ✓ Highly vapour permeable (Class 4)
- ✓ Weathertight & airtight weather resistive barrier (WRB)
- ✓ Next generation non-porous monolithic technology

SOLITEX EXTASANA® is a UV stabilised and tear resistant weather resistive barrier (WRB). It contains a non-porous, water resistant TEEE film that is laminated at high temperatures between two layers of spun bonded polypropylene.

This product is designed for use behind most typical wall cladding systems, including cavity brick, fibre-cement, masonry and other common wall systems. It is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959.

TECHNICAL DATA

| | | |
|------------------------------------|---------------------|--------------------|
| UV stability and outdoor exposure: | 180 days | ASTM G154 |
| Duty classification: | Light wall | AS/NZS 4200.1-2017 |
| Vapour classification: | Class 4 (Permeable) | AS/NZS 4200.1-2017 |
| Flammability index: | < 5 | AS 1530.2-1993 |
| Thickness: | 0.60 mm ± 0.05 mm | EN 1489-2 |
| Temperature resistance: | -40 °C to +120 °C | |
| Heat shrinkage @ 70°C: | 0.0% | ASTM D1204 |
| Water control: | 10,000 mm | EN 20811 |
| | Pass (> 100 mm) | AS/NZS 4201.4-1994 |
| | Water barrier | AS/NZS 4200.1-2017 |

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|---------|--------|--------|--------------------|---------|-----|
| 13547 | 36.5 m | 1.50 m | 55 m ² | 8.5 | 1 |
| 13323 | 36.5 m | 2.74 m | 100 m ² | 16 | 1 |





Weather Resistive Barrier System

by pro clima

SOLITEX EXTASANA®

Wall Weather Resistive Barrier

KAFLEX mono/duo

Cable Sealing Grommet

TESCON EXTORA®

Weather-tight Sealing Tape

CONTEGA EXO

Joinery Connection Strip - Exterior

TESCON EXTONSEAL®

Sill Tape

ROFLEX


Sealing Grommets for Pipes

ORCON CLASSIC

Multi-Purpose Liquid Adhesive

TESCON PRIMER RP

Solvent-Free Primer

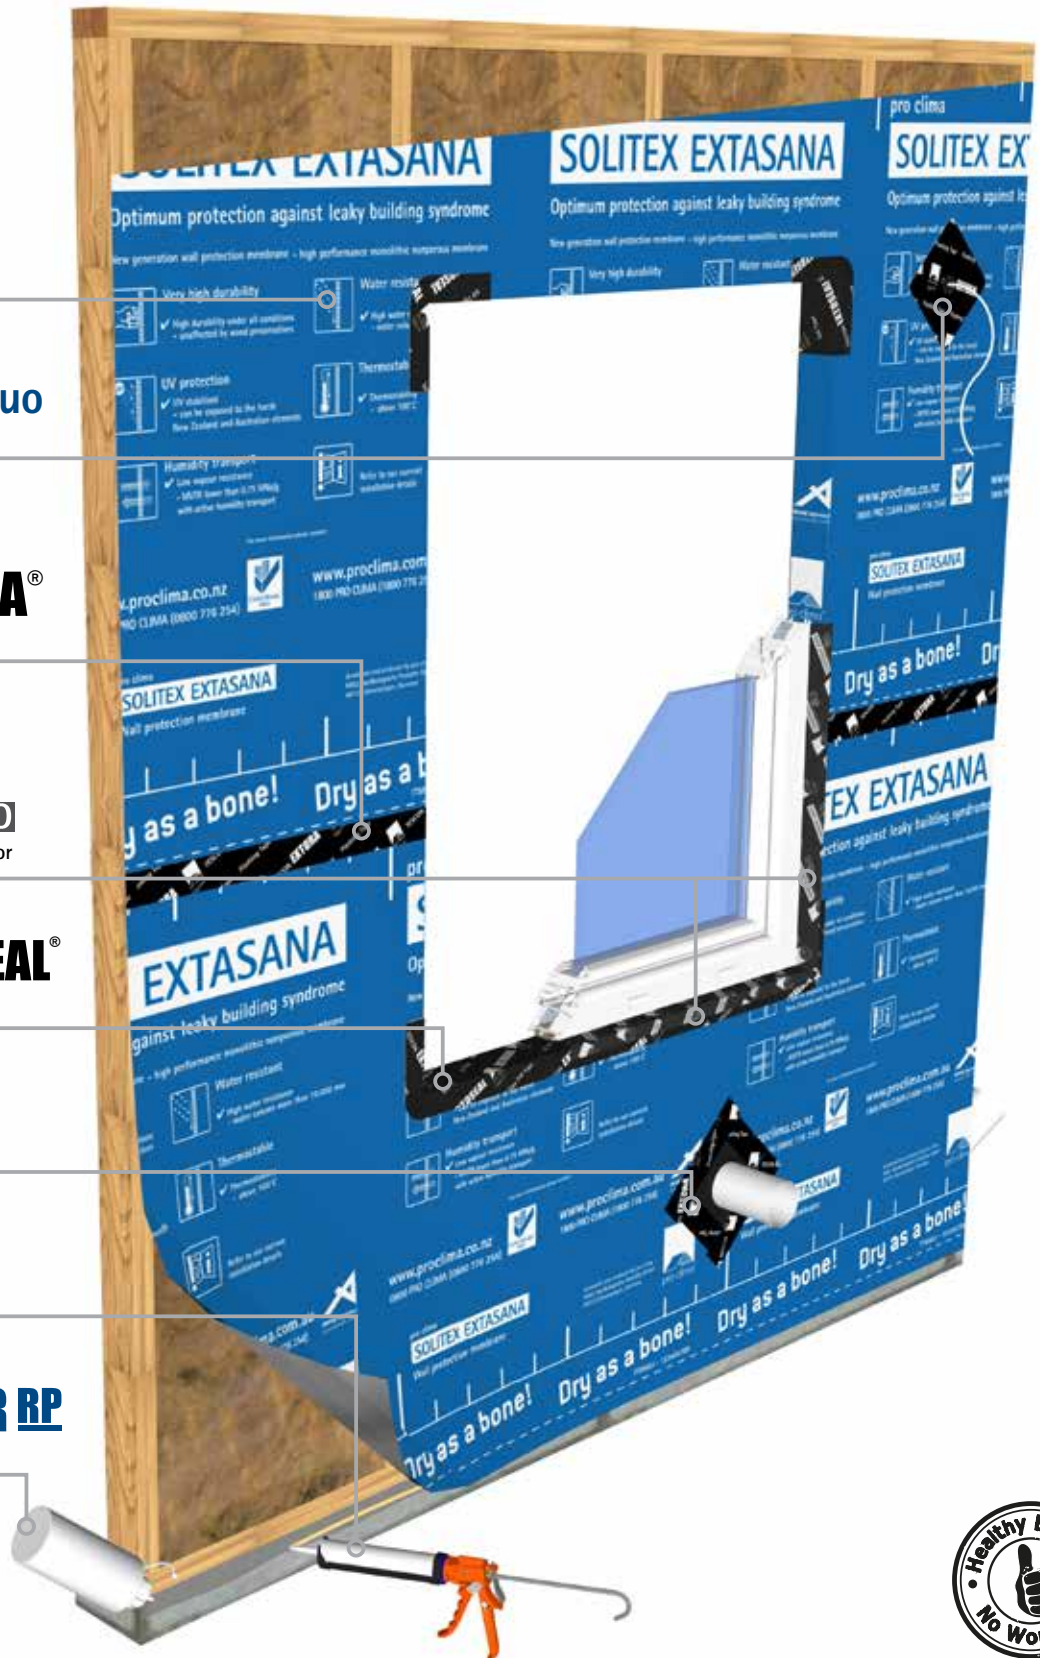



SOLITEX EXTASANA ADHERO®

Self-Adhesive Weather Resistive Barrier

- ✓ Fully self-adhered membrane
- ✓ 180 days UV resistance and excellent durability
- ✓ Isolates any leaks caused by penetrations or accidental damage
- ✓ Ideal solution for pre-fab systems

SOLITEX EXTASANA ADHERO® is a UV stabilised and tear resistant weather resistive barrier (WRB). It contains a non-porous, water resistant TEEE film, with a full solid acrylate adhesive back and siliconized release paper.


This product is designed for use in exterior cladding systems and can be fully adhered to rigid substrates, It is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959.

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|----------|--------|-------|-------------------|---------|-----|
| 1AR01968 | 30.0 m | 1.5 m | 45 m ² | 12 | 1 |

TECHNICAL DATA

| | | |
|------------------------------------|-----------------------|--------------------|
| UV stability and outdoor exposure: | 180 days | ASTM G154 |
| Duty classification: | Depends on substrate* | AS/NZS 4200.1-2017 |
| Vapour classification: | Depends on substrate* | AS/NZS 4200.1-2017 |
| Flammability index: | < 5 | AS 1530.2-1993 |
| Thickness: | 0.70 mm ± 0.05 mm | EN 1489-2 |
| Temperature resistance: | -40 °C to +100 °C | |
| Heat shrinkage @ 70°C: | 0.0% | ASTM D1204 |
| Water control: | 10,000 mm | EN 20811 |
| | Pass (> 100 mm) | AS/NZS 4201.4-1994 |
| | Water barrier | AS/NZS 4200.1-2017 |

*Performance characteristics will be modified by the rigid substrate

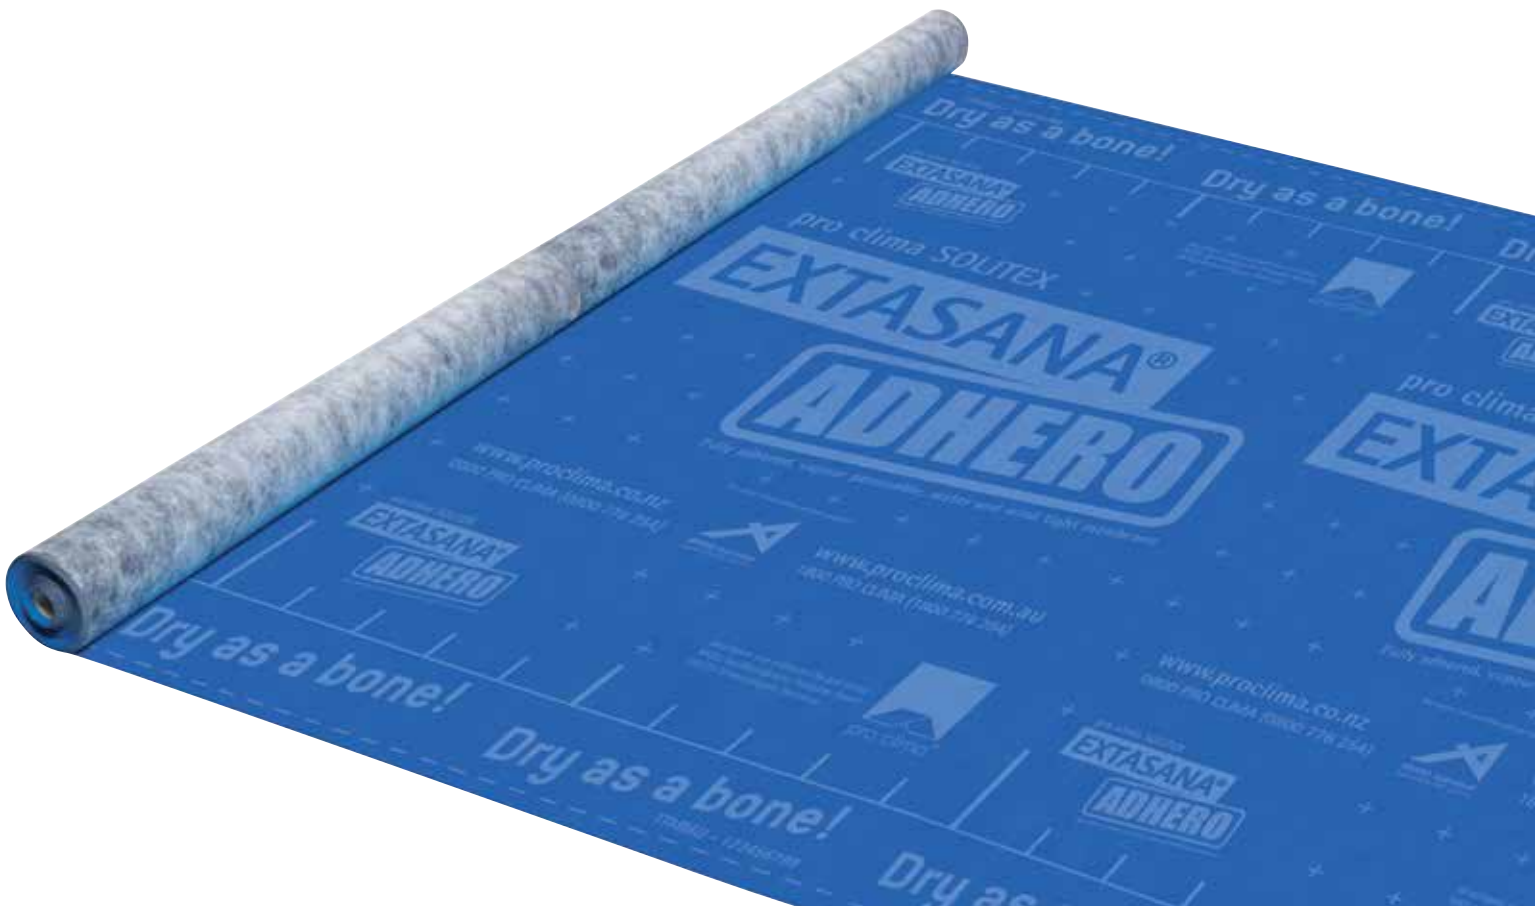



Weather Resistive Barrier System

by pro clima

SOLITEX EXTASANA ADHERO®

Self-Adhesive Weather Resistive Barrier

KAFLEX mono/duo

Cable Sealing Grommet

TESCON EXTORA®

Weathertight Sealing Tape

CONTEGA EXO

Joinery Connection Strip - Exterior

TESCON EXTOSEAL®

Sill Tape


ROFLEX

Sealing Grommets for Pipes

Rigid Air Barrier

TESCON® PRIMER RP

Solvent-Free Primer

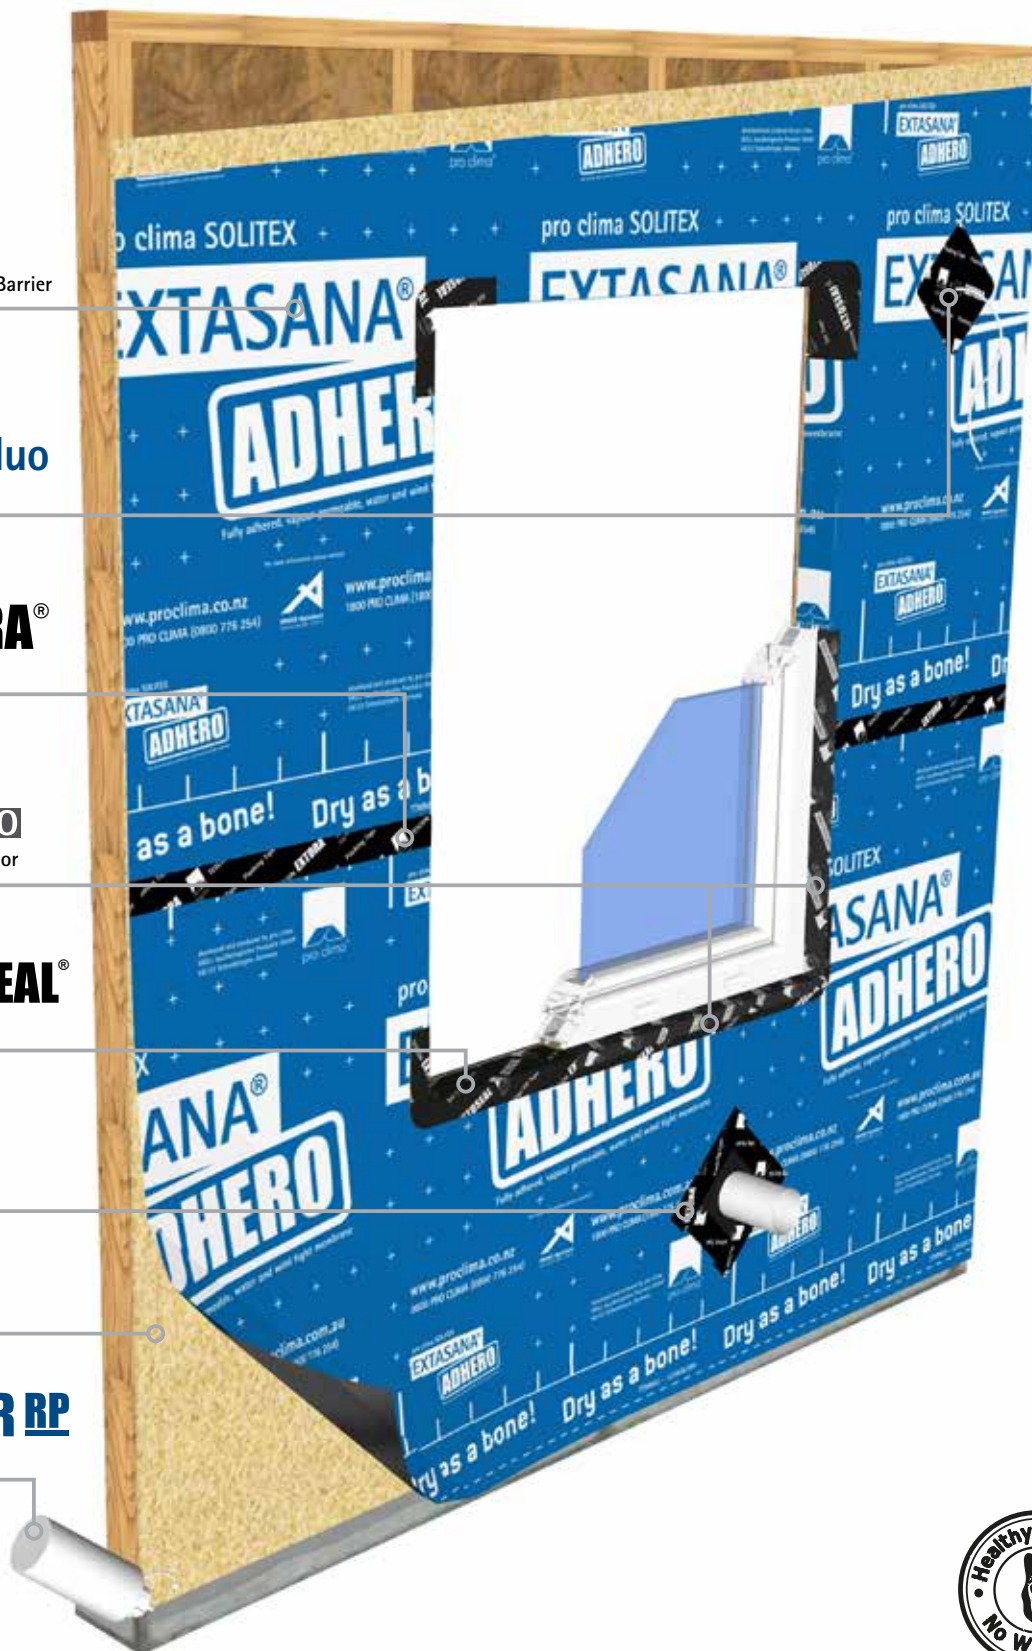



SOLITEX MENTO® PLUS

Roof Weather Resistive Barrier

- ✓ 180 days UV resistance with long term durability
- ✓ Highly vapour permeable (Class 4)
- ✓ Weathertight and airtight weather resistive barrier (WRB)
- ✓ Helps protect building from condensation

SOLITEX MENTO® PLUS is a UV stabilised and tear resistant weather resistive barrier (WRB). It contains a non-porous, water resistant TEEE film that is laminated at high temperatures between two layers of spun bonded polypropylene, and also has an added scrim for extra strength.

This product is suitable for use in tile, metal and slate roof applications and it is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959.

TECHNICAL DATA

| | | |
|------------------------------------|---------------------|--------------------|
| UV stability and outdoor exposure: | 180 days | ASTM G154 |
| Duty classification: | Medium | AS/NZS 4200.1-2017 |
| Vapour classification: | Class 4 (Permeable) | AS/NZS 4200.1-2017 |
| Flammability index: | < 5 | AS 1530.2-1993 |
| Thickness: | 0.60 mm ± 0.1 mm | EN 1489-2 |
| Temperature resistance: | -40 °C to +100 °C | |
| Heat shrinkage at 70°C: MD/LD | 0.4% / 0.0% | ASTM D1204 |
| Water control: | > 2,500 mm | EN 20811 |
| | Pass (> 100 mm) | AS/NZS 4201.4-1994 |
| | Water barrier | AS/NZS 4200.1-2017 |

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|--------------------|--------|--------|--------------------|---------|-----|
| 1AR02396 | 50 m | 1.50 m | 75 m ² | 13 | 1 |
| 1AR02494 | 50 m | 3.00 m | 150 m ² | 26 | 1 |
| 1AR02493 (connect) | 50 m | 1.50 m | 75 m ² | 13 | 1 |

Also available: **connect** -technology with two integrated self-adhesive strips





Weather Resistive Barrier System


by pro clima

SOLITEX
MENTO PLUS®
Roof Weather Resistive Barrier

TESCON EXTORA®
Weathertight Sealing Tape

TESCON® NAiDECK
Double Sided Self-Sealing Strip

INTELLO® PLUS
Intelligent Air Barrier

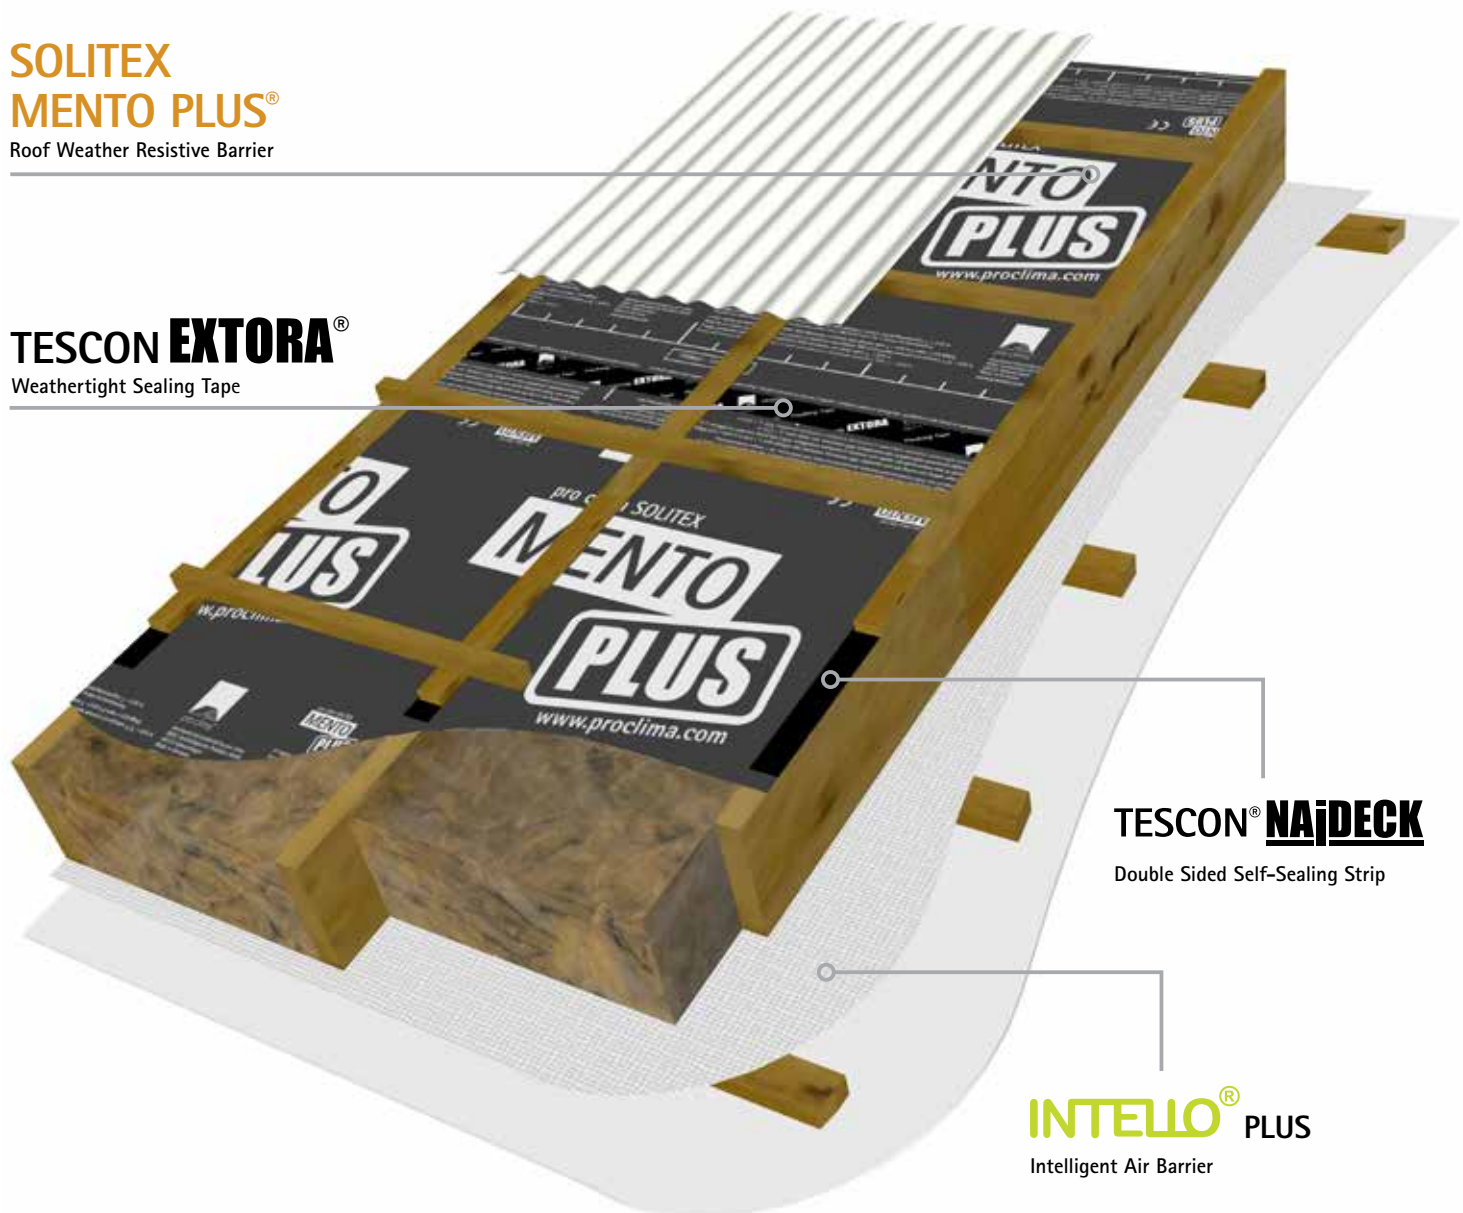



SOLITEX MENTO® 5000

Roof Weather Resistive Barrier

- ✓ 180 days UV resistance with long term durability
- ✓ Rated to withstand temperature of up to 120 °C
- ✓ Highly vapour permeable (Class 4)
- ✓ Weathertight and airtight weather resistive barrier (WRB)

SOLITEX MENTO® 5000 is a UV stabilised and tear resistant weather resistive barrier (WRB). It contains a non-porous, water resistant TEEE film that is laminated at high temperatures between two layers of spun bonded polypropylene.

This product is suitable for use in tile, metal and slate roof applications and it is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959.

TECHNICAL DATA

| | | |
|------------------------------------|---------------------|--------------------|
| UV stability and outdoor exposure: | 180 days | ASTM G154 |
| Duty classification: | Light | AS/NZS 4200.1-2017 |
| Vapour classification: | Class 4 (Permeable) | AS/NZS 4200.1-2017 |
| Flammability index: | < 5 | AS 1530.2-1993 |
| Thickness: | 0.70 mm ± 0.1 mm | EN 1489-2 |
| Temperature resistance: | -40 °C to +120 °C | |
| Heat shrinkage @ 70°C: MD/LD | 0.0% / 0.0% | ASTM D1204 |
| Water control: | 10,000 mm | EN 20811 |
| | Pass (> 100 mm) | AS/NZS 4201.4-1994 |
| | Water barrier | AS/NZS 4200.1-2017 |

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|--------------------|--------|--------|--------------------|---------|-----|
| 1AR01868 | 50 m | 1.50 m | 75 m ² | 16 | 1 |
| 1AR01870 | 50 m | 3.00 m | 150 m ² | 34 | 1 |
| 1AR02283 (connect) | 50 m | 1.50 m | 75 m ² | 16 | 1 |

Also available: **connect** -technology with two integrated self-adhesive strips





SOLITEX MENTO[®] ULTRA

Roof Weather Resistive Barrier

- ✓ Extra heavy-duty classification (AS/NZS 4200.1) providing superior strength
- ✓ 180 days UV resistance with long term durability
- ✓ Highly vapour permeable (Class 4)
- ✓ Weathertight and airtight weather resistive barrier (WRB)

SOLITEX MENTO[®] ULTRA is a UV stabilised and tear resistant weather resistive barrier (WRB). It contains a non-porous, water resistant TEEE film that is laminated at high temperatures between two layers of spun bonded polypropylene.

This product is suitable for use in tile, metal and slate roof applications, including those requiring an extra heavy-duty classification (AS/NZS 4200.1) and it is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959.

TECHNICAL DATA

| | | |
|------------------------------------|---------------------|--------------------|
| UV stability and outdoor exposure: | 180 days | ASTM G155 |
| Duty classification: | Extra heavy | AS/NZS 4200.1-2017 |
| Vapour classification: | Class 4 (Permeable) | AS/NZS 4200.1-2017 |
| Flammability index: | < 5 | AS 1530.2-1993 |
| Thickness: | 0.90 mm ± 0.1 mm | EN 1489-2 |
| Temperature resistance: | -40 °C to +100 °C | |
| Heat shrinkage @ 70°C: MD/LD | 0.0% / 0.0% | ASTM D1204 |
| Water control: | > 2,500 mm | EN 20811 |
| | Pass (> 100 mm) | AS/NZS 4201.4-1994 |
| | Water barrier | AS/NZS 4200.1-2017 |

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|----------|--------|--------|-------------------|---------|-----|
| 1AR00629 | 50 m | 1.50 m | 75 m ² | 16.5 | 1 |





SOLITEX[®] UM connect

Roof Weather Resistive Barrier

- ✓ 3D separation layer provides ventilation between roof/wall and the weather resistive barrier (WRB)
- ✓ Highly vapour permeable (Class 4)
- ✓ Weathertight and airtight weather resistive barrier (WRB)
- ✓ Helps protect building from condensation

SOLITEX[®] UM connect is a weather resistive barrier that contains an inbuilt 3D separation layer and integrated self-adhesive strips. It is suitable for both ventilated and unventilated structures in combination with most roof and wall cladding materials. It contains a non-porous, water resistant TEEE film that is laminated at high temperatures between two layers of spun bonded polypropylene.

This product is suitable for use in tile, metal and slate roof applications and it is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959. It can also be used in wall applications behind most cladding materials.

TECHNICAL DATA

| | | |
|----------------------------------|--------------------------|--------------------|
| Cover-fleece + protective-layer: | PP microfibre fleeces | |
| Membrane: | Monolithic TEEE film | AS/NZS 4200.1-2017 |
| Thickness: | 8.0 ±0.5 mm | AS/NZS 4200.1-2017 |
| Vapour classification: | Class 4 (Permeable) | AS 1530.2-1993 |
| Flammability index: | < 5 | EN 1489-2 |
| Surface weight: | 450 ±10 g/m ² | |
| Temperature resistance: | -40 °C to +100 °C | |
| Heat shrinkage @ 100°C: MD/LD | 0.8% / 0.0% | ASTM D1204 |
| Water control: | 10,000 mm | EN 20811 |
| | Pass (> 100 mm) | AS/NZS 4201.4-1994 |
| | Water barrier | AS/NZS 4200.1-2017 |

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|---------|--------|--------|---------------------|---------|-----|
| 13598 | 25 m | 1.50 m | 37.5 m ² | 15 | 1 |






Weather Resistive Barrier System

by pro clima

SOLITEX® UM connect
Roof Weather Resistive Barrier

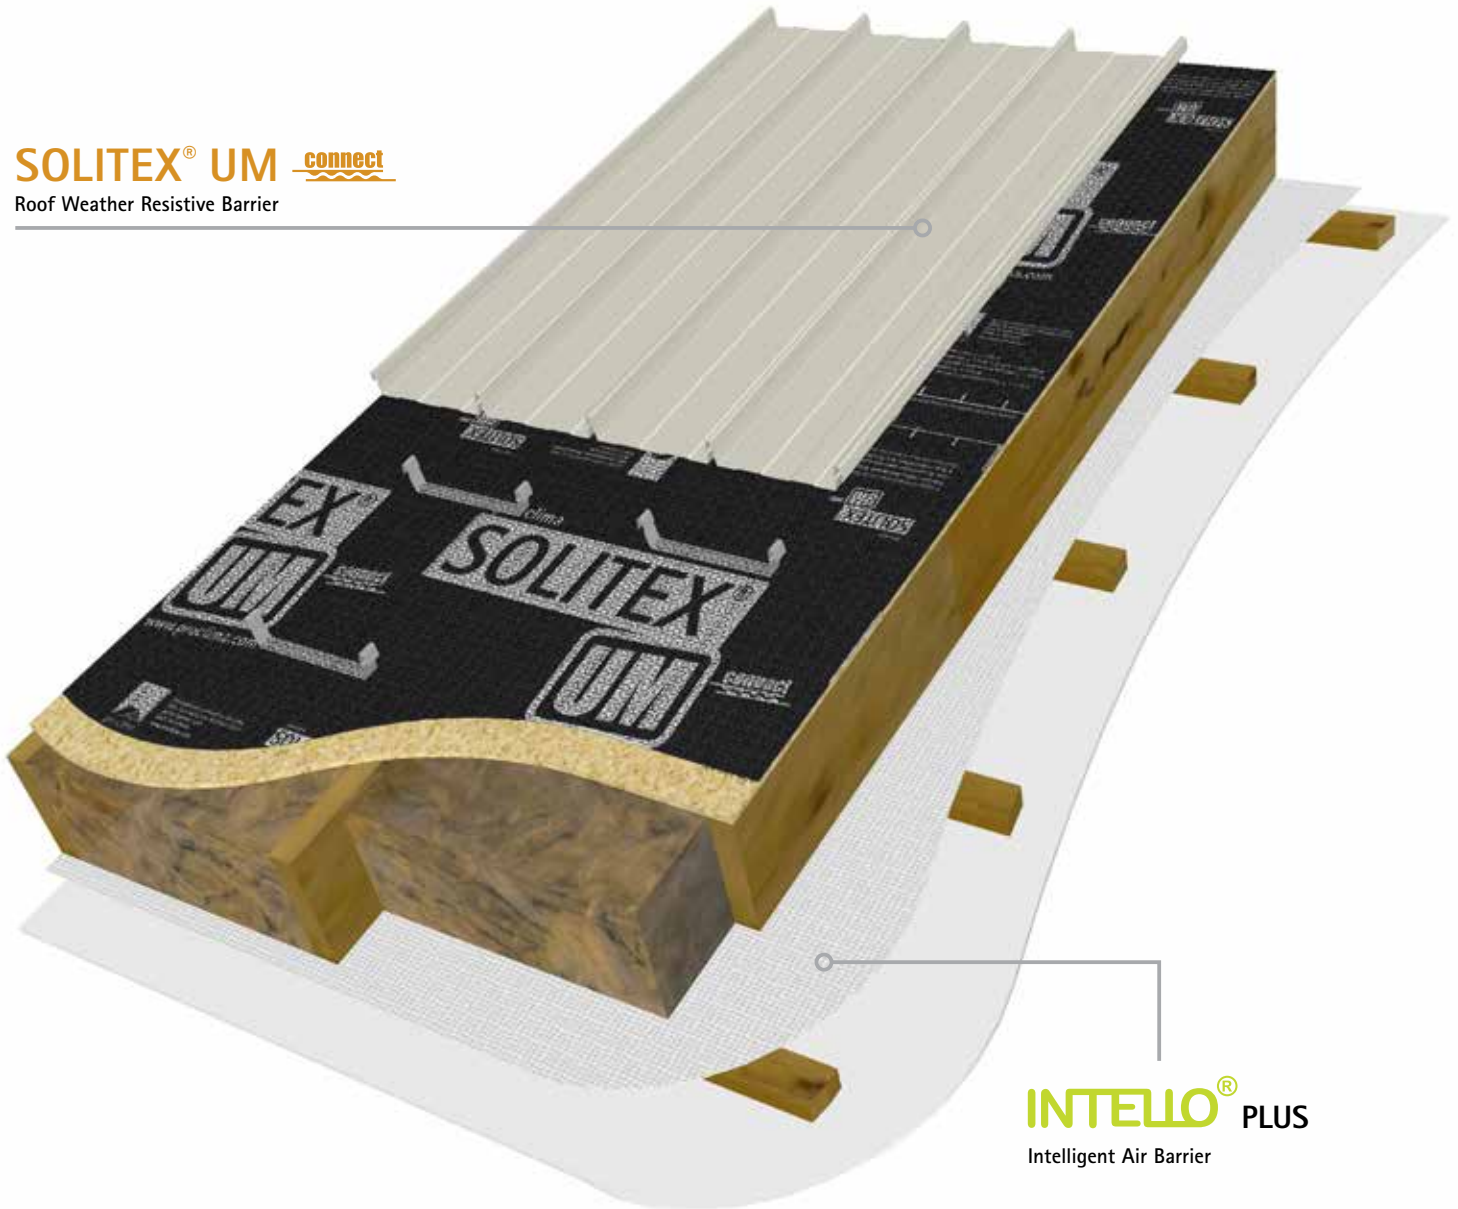

INTELLO® PLUS
Intelligent Air Barrier





DA

Wall Weather Resistive Barrier

- ✓ Ideal for tropical climates
- ✓ Acts as a vapour check and airtightness layer simultaneously
- ✓ Protects from exterior sources of high humidity
- ✓ Weathertight & airtight weather resistive barrier (WRB)

DA is a UV stabilised and tear resistant weather resistive barrier (WRB). It can be used as an external airtightness and vapour control layer on walls. Its water resistivity provides protection against the elements during the construction phase.

DA is designed for use behind most typical wall cladding systems, including cavity brick, fibre-cement, masonry and other common wall systems in tropical areas. It is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959.

TECHNICAL DATA

| | | |
|-------------------------|--------------------------|-----------------------|
| Air control: | ≥ 0.1 MNs/m ² | ISO 5636.5, BS 6538.3 |
| | Air barrier | AS/NZS 4200.1-2017 |
| Duty classification: | Light wall | AS/NZS 4200.1-2017 |
| Vapour classification: | Class 2 | AS/NZS 4200.1-2017 |
| Vapour permeance: | 0.0853 µg/N.s | |
| Flammability index: | < 5 | AS 1530.2-1993 |
| Thickness: | 0.45 mm ± 0.05 mm | EN1489-2 |
| Temperature resistance: | -40 °C to +100 °C | |
| Water control: | > 2,500 mm | EN 20811 |
| | Pass (> 100 mm) | AS/NZS 4201.4-1994 |
| | Water barrier | AS/NZS 4200.1-2017 |

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|---------|--------|--------|-------------------|---------|-----|
| 10098 | 50 m | 1.50 m | 75 m ² | 10 | 1 |





Weather Resistive Barrier System

by pro clima

DA

Wall Weather Resistive Barrier

KAFLEX mono/duo

Cable Sealing Grommet

TESCON EXTORA®

Weathertight Sealing Tape

CONTEGA EXO

Joinery Connection Strip - Exterior

TESCON EXTOSEAL®

Sill Tape

ROFLEX


Sealing Grommets for Pipes

ORCON CLASSIC

Multi-Purpose Liquid Adhesive

TESCON PRIMER RP

Solvent-Free Primer

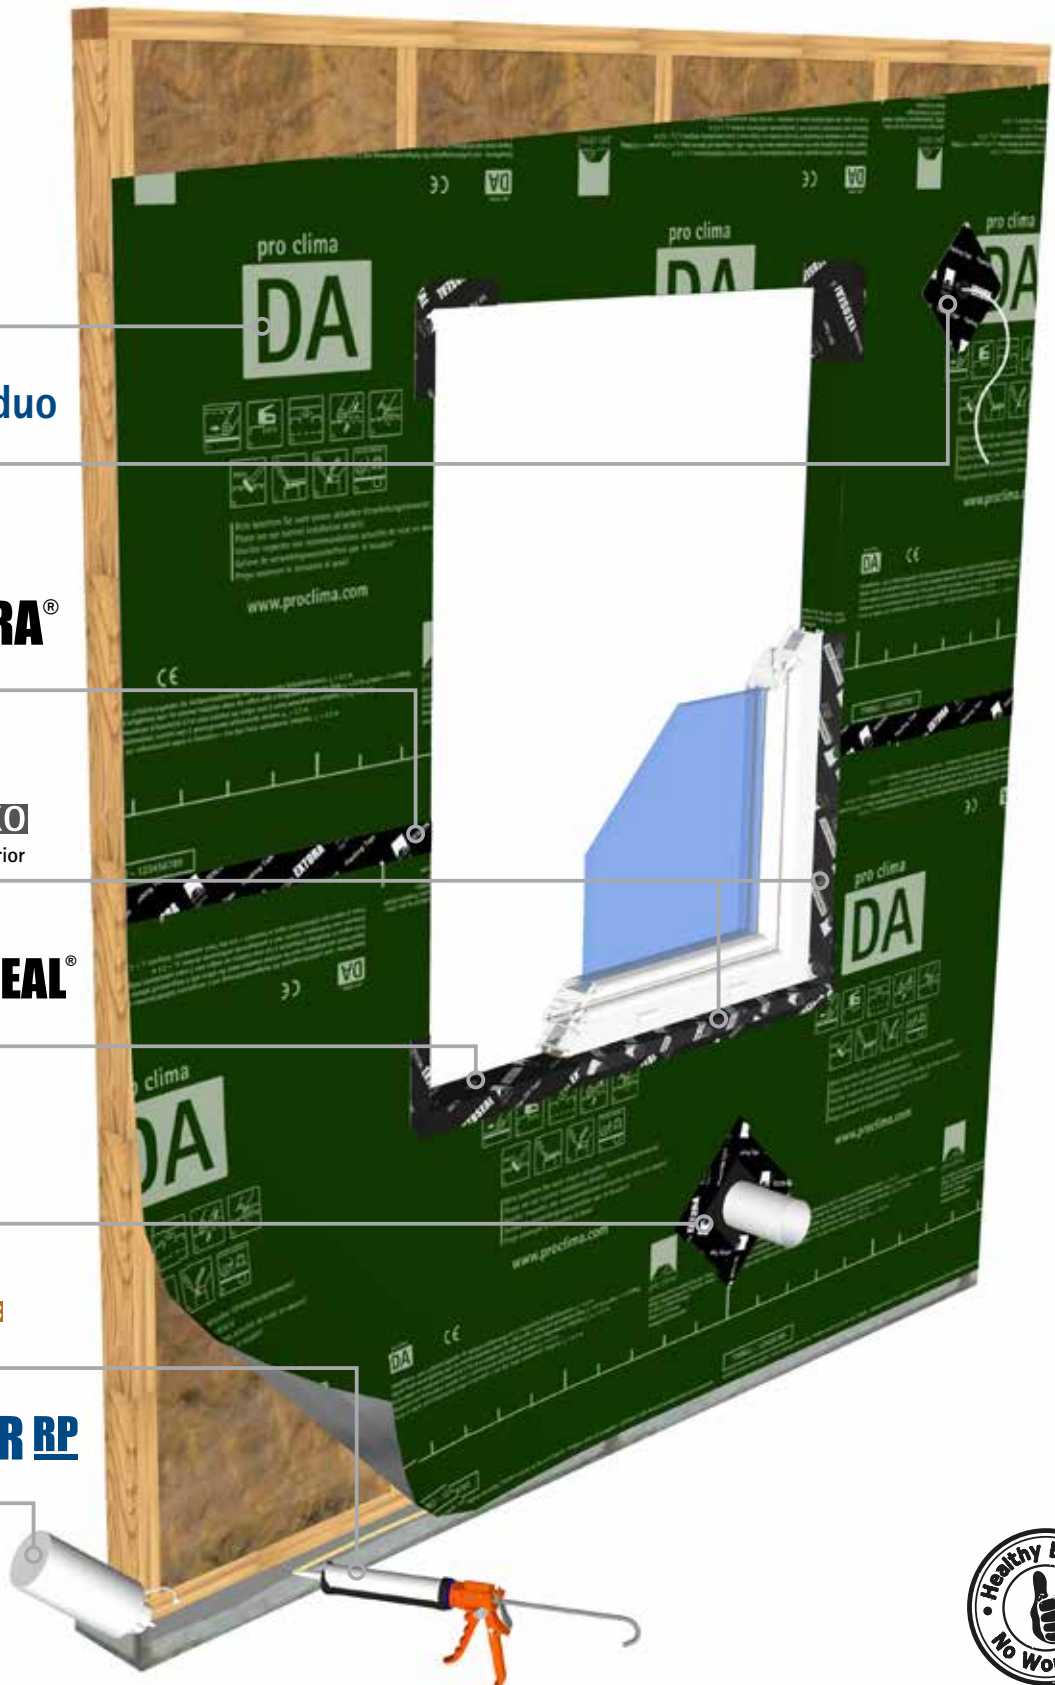



INTELLO[®] PLUS

Intelligent Air Barrier

- ✓ Intelligent air barrier (IAB) for warm, dry, healthy buildings
- ✓ Maximises thermal insulation performance
- ✓ Highly diffusion resistant in winter
- ✓ Excellent back diffusion capacity in summer

INTELLO[®] PLUS is an intelligent air barrier, with smart vapour control. The humidity variable response is achieved by the polyethylene copolymer, laminated on spun bond polypropylene and reinforced with polypropylene mesh.

INTELLO[®] PLUS can be installed in wall and ceiling applications and must be installed with the plastic film (the printed side) facing the installer. INTELLO[®] PLUS should not be exposed to water or UV during the construction or operation of the building.

TECHNICAL DATA

| | | |
|-------------------------|---------------------------------|-----------------------|
| Air control: | $\geq 0.1 \text{ MNs/m}^3$ | ISO 5636.5, BS 6538.3 |
| | Air barrier | AS/NZS 4200.1-2017 |
| Vapour classification: | Class 2 - Class 3 | AS/NZS 4200.1-2017 |
| Vapour permeance: | 0.8 - $< 0.008 \mu\text{g/N.s}$ | |
| Temperature resistance: | -40 °C to +80 °C | |
| Flammability index: | < 5 | AS 1530.2-1993 |

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|---------|--------|--------|--------------------|---------|-----|
| 11367 | 50 m | 1.50 m | 75 m ² | 9 | 1 |
| 13590 | 50 m | 3.00 m | 150 m ² | 18 | 1 |





Intelligent Air Barrier System

by pro clima

INTELLO[®] PLUS
Intelligent Air Barrier

KAFLEX mono/duo
Cable Sealing Grommet


TESCON[®] Vana
Multi-Purpose Adhesive Tape

CONTEGA[®] IQ
Joinery Connection Strip - Interior

ROFLEX
Sealing Grommets for Pipes

ORCON[®] CLASSIC
Multi-Purpose Liquid Adhesive

TESCON[®] PRIMER RP
Solvent-Free Primer

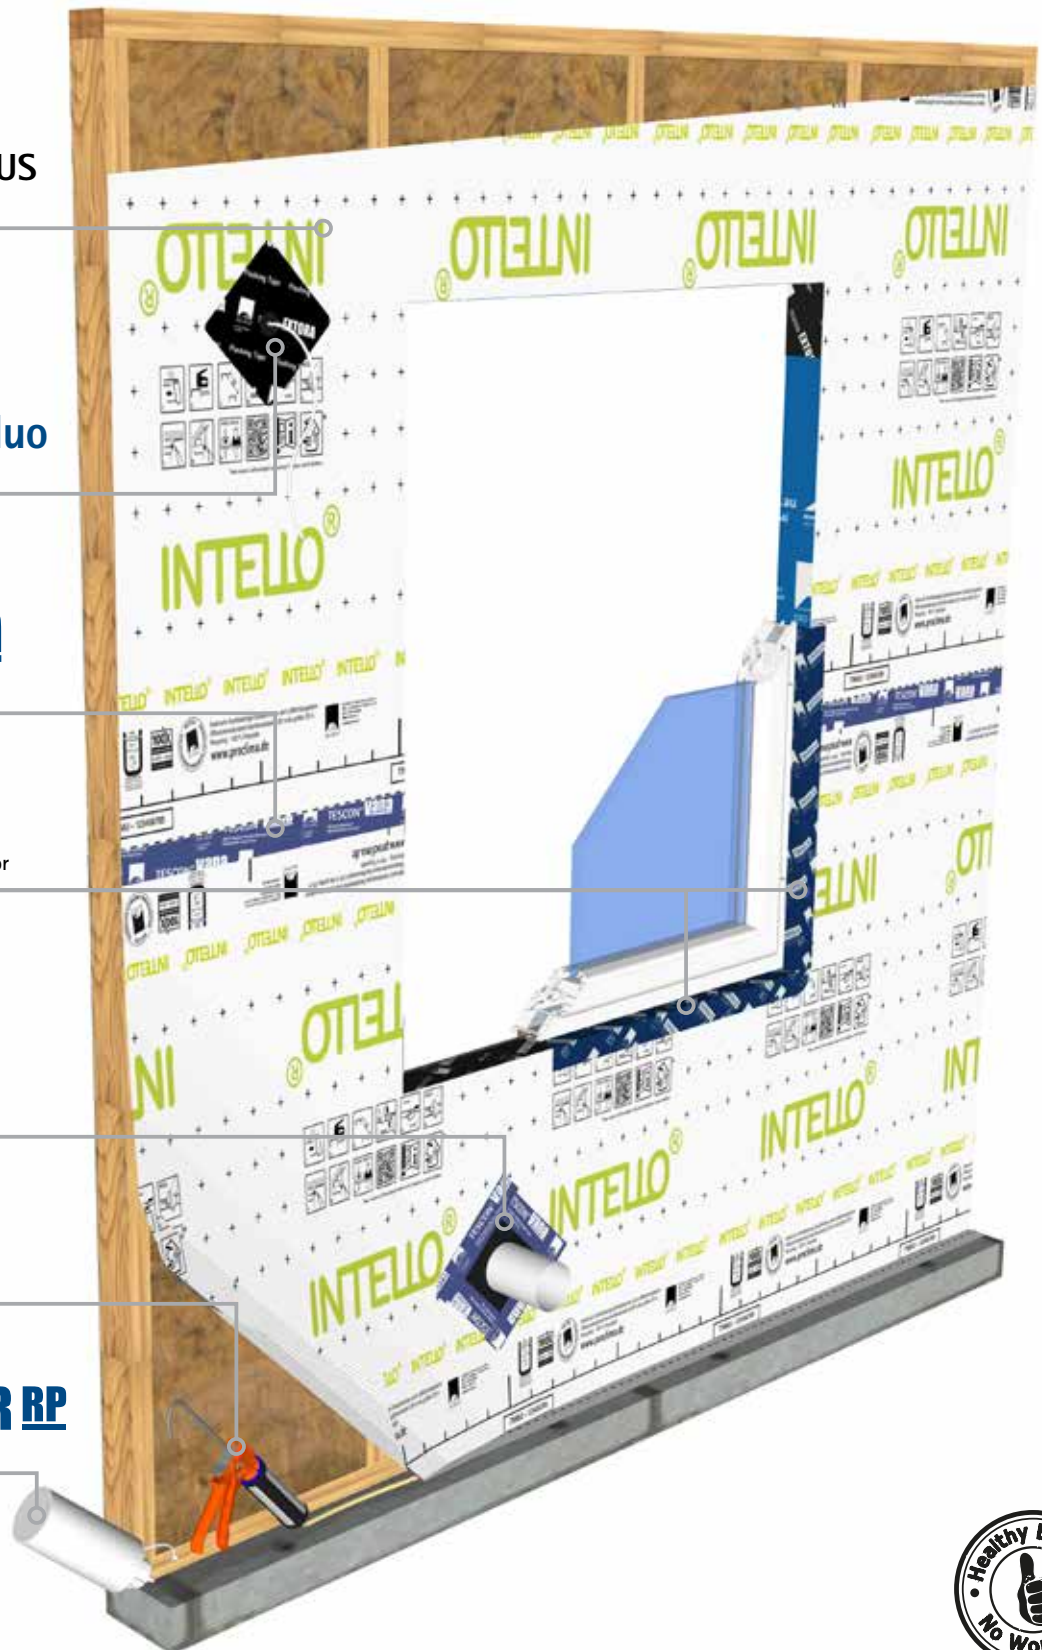



Connection Solution for INTELLO® IAB System

- ✓ Solves the problem of challenging airtightness junctions
- ✓ Humidity variable functionality utilising Hydrosafe® technology
- ✓ UV stable for up to 90 days of exposure
- ✓ Available in multiple widths for differing applications

INTELLO® conneX is the missing link for your Intelligent Air Barrier (IAB) system. It is designed to ensure the continuity of the INTELLO PLUS® IAB system at internal/external wall and midfloor junctions. With humidity variable functionality and UV stability for up to 90 days, it ensures the IAB system will perform for the life of the building.

TECHNICAL DATA

| | | |
|-------------------------|--------------------------|-----------------------|
| Air control: | ≥ 0.1 MNs/m ³ | ISO 5636.5, BS 6538.3 |
| | Air barrier | AS/NZS 4200.1-2017 |
| Vapour classification: | Class 2 - Class 3 | AS/NZS 4200.1-2017 |
| Vapour permeance: | 0.0709 µg/N.s | |
| Temperature resistance: | -40 °C to +80 °C | |
| Flammability index: | < 5 | AS 1530.2-1993 |

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|----------|--------|--------|------------------|---------|-----|
| 1AR02326 | 50 m | 300 mm | 15m ² | | 1 |
| 1AR03352 | 50 m | 900 mm | 45m ² | | 1 |





AEROSANA® VISCONN

Intelligent Air Barrier

- ✓ Extremely quick application – simply spray it on
- ✓ Effective on transitions and detail features with lots of edges and corners
- ✓ Sticks to all standard construction surfaces
- ✓ Can be plastered, painted or adhered to

AEROSANA® VISCONN is a humidity variable, spray on airtightness seal, allowing you to work quickly and achieve high levels of airtightness, particularly on difficult transitions and construction details.

AEROSANA® VISCONN can be used in internal applications on all wall and ceiling types, and is particularly effective on masonry walls.

TECHNICAL DATA

| | |
|--------------------------|--|
| Vapour classification: | Class 2 – Class 3 |
| Vapour permeance: | 1.54 - <0.02 µg/N.s |
| Application temperature: | 5 °C to +35 °C |
| Temperature resistance: | Permanent -40 °C to 90 °C (dried) |
| Coverage: | Approx. 750 ml/m ² , depending on applied thickness |

| ID CODE | FORMS OF DELIVERY | CONTENT | COVERAGE | PIECE/PAL. |
|----------|-------------------|----------|-----------------------|------------|
| 1AR01106 | Bucket | 10 Litre | 750 ml/m ² | 45 |





TESCON **EXTORA**[®]

Weathertight Sealing Tape

- ✓ Excellent UV resistance (180 days exposure)
- ✓ Long term durability and highly vapour permeable
- ✓ Outstanding adhesion on cold and/or wet surfaces
- ✓ Available in a range of widths to suit varying applications

TESCON EXTORA[®] is a UV stabilised, multi-purpose tape which forms an essential part of your weather resistive barrier (WRB) system. Made from polypropylene with acrylate, it has excellent workability and adhesion for optimal resistance to driving rain at junctions in your WRB layer.

| ID CODE | LENGTH | WIDTH | BACKING | QTY |
|---------|--------|--------|--------------|-----------------------------|
| 13206 | 30 m | 60 mm | No split | 1 |
| 13486 | 30 m | 60 mm | No split | 20 <small>big pack*</small> |
| 13280 | 30 m | 100 mm | 50/50 split | 1 |
| 14891 | 30 m | 150 mm | 50/100 split | 1 |
| 14892 | 30 m | 200 mm | 50/150 split | 1 |

TECHNICAL DATA

| | |
|------------------------------------|----------------------------|
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | From -20 °C |
| UV stability and outdoor exposure: | 180 days |
| Storage: | Cool and dry |



TESCON **EXTORA**[®] **PROFIL**

Weathertight Sealing Tape

- ✓ Split backing release paper (10mm/50mm) ensuring maximum productivity
- ✓ Long term durability and highly vapour permeable
- ✓ Outstanding adhesion on cold and/or wet surfaces
- ✓ Excellent UV resistance (180 days exposure)

TESCON EXTORA[®] PROFIL is a UV stabilised, multi-purpose tape which forms an essential part of your weather resistive barrier (WRB) system. The 10mm split back edge allows for application at edges and junctions where the tapes can be aligned and then fully adhered on a second pass.

TECHNICAL DATA

| | |
|------------------------------------|----------------------------|
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | From -20 °C |
| UV stability and outdoor exposure: | 180 days |
| Storage: | Cool and dry |

| ID CODE | LENGTH | WIDTH | BACKING | QTY |
|---------|--------|-------|-------------|-----------------------------|
| 15050 | 30 m | 60 mm | 10/50 split | 1 |
| 15236 | 30 m | 60 mm | 10/50 split | 20 <small>big pack*</small> |

*big pack product only sold per unit.



TESCON **EXTONSEAL**[®]

Sill Tape

- ✓ Weathertight sill tape allowing water to drain safely outside
- ✓ Seal-sealing around nail and screw penetrations
- ✓ Very-high adhesive strength
- ✓ Excellent UV resistance (180 days exposure)

TESCON EXTONSEAL[®] is a UV stabilised sill flashing tape made from butyl rubber modified with acrylate. It is malleable and easily workable into difficult to seal corners and junctions for optimal resistance to driving rain at window openings.

TECHNICAL DATA

| | |
|------------------------------------|----------------------------|
| Temperature resistance: | Long term -30 °C to +90 °C |
| Installation temperature: | From -20 °C |
| UV stability and outdoor exposure: | 180 days |
| Storage: | Cool and dry |

| ID CODE | LENGTH | WIDTH | BACKING | QTY |
|---------|--------|--------|--------------|-----|
| 14152 | 20 m | 150 mm | 90/60 split | 1 |
| 14156 | 20 m | 200 mm | 140/60 split | 1 |



TESCON[®] **NAIDECK** mono patch

Self-Sealing Patches

- ✓ Self-seals around screws, nails and other penetrations
- ✓ Pre-cut patches for fast install
- ✓ Reduces product usage by only applying where penetrations occur
- ✓ Compatible with all pro clima WRB systems

TESCON[®] NAIDECK mono patch is a self-sealing butyl patch for use on your weather resistive barrier (WRB), where any penetrations, such as screws, nails or other fixings, are required through the membrane.

TECHNICAL DATA

| | |
|------------------------------------|----------------------------|
| Temperature resistance: | Long term -30 °C to +90 °C |
| Installation temperature: | From -20 °C |
| UV stability and outdoor exposure: | 180 days |
| Storage: | Cool and dry |

| ID CODE | SIZE | PATCHES | QTY |
|----------|------------|---------|-----|
| 1AR02157 | 80 x 60 mm | 300 | 1 |



TESCON® **NAIDECK**

Double Sided Self-Sealing Strip

- ✓ Ultimate water resistance on low slope roofs
- ✓ Long term durability and highly vapour permeable
- ✓ Double sided for connection strength and durability
- ✓ Compatible with SOLITEX MENTO® and SOLITEX EXTASANA® WRB systems

TESCON® NAIDECK is a double sided, self-sealing strip made from butyl for use on the underside of purlins and battens fixed directly to your weather resistive barrier (WRB), where any attachment requires a penetration through the WRB layer.

| ID CODE | LENGTH | WIDTH | QTY |
|---------|--------|-------|-----------------------------|
| 13599 | 20 m | 50 mm | 1 |
| 13600 | 20 m | 50 mm | 24 <small>big pack*</small> |

TECHNICAL DATA

| | |
|---------------------------|----------------------------|
| Carrier material: | Butyl rubber |
| Temperature resistance: | Long term -20 °C to +80 °C |
| Installation temperature: | From +5 to +35 °C |
| Storage: | Cool and dry |

*big pack product only sold per unit.



CONTEGA® **EXO**

Joinery Connection Strip - Exterior

- ✓ Weathertight seal around windows and doors
- ✓ Flexible and expandable, to accommodate building movement
- ✓ Thin, highly pliable and easily formed around corners and shapes
- ✓ Airtight connection for the life of the building

CONTEGA® EXO is a vapour permeable external connection adhesive tape which provides effective connections to windows and doors. Made from polypropylene with acrylate adhesive, it forms as essential part of your weather resistive barrier (WRB) system.

TECHNICAL DATA

| | |
|------------------------------------|----------------------------|
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | Above -10 °C |
| UV stability and outdoor exposure: | 90 days |
| Storage: | Cool and dry |

| ID CODE | LENGTH | WIDTH | QTY | QTY |
|----------|--------|--------|-----|-----|
| 15844 | 30 m | 85 mm | 1 | 1 |
| 1AR01266 | 30 m | 120 mm | 1 | 1 |



CONTEGA[®] IQ

Joinery Connection Strip – Interior

- ✓ Effective airtight seal around windows and doors
- ✓ Outstanding adhesion on cold and/or wet surfaces
- ✓ Airtight connect for the life of the building
- ✓ Thin, pliable and easily formed around corners and shapes

CONTEGA[®] IQ is a vapour permeable adhesive strip, used to make effective connections between an internal air barrier and penetrations such as windows and doors. Made from polypropylene with acrylate adhesive, it has excellent workability and adhesion for effective and durable air seals. CONTEGA[®] IQ has an extension fold to allow expansion from 90 mm to 120 mm.

| PRODUCT | ID CODE | LENGTH | WIDTH | QTY |
|---|---------|--------|-------|-----|
| 1 self-adhesive strip (for masonry construction) | 14897 | 30 m | 90 mm | 1 |
| 2 self-adhesive strips (for timber construction) | 14896 | 30 m | 90 mm | 1 |

TECHNICAL DATA

| | |
|------------------------------------|------------------------------|
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | Above -10 °C |
| UV stability and outdoor exposure: | Indoor use only |
| Storage: | Cool and dry (1 °C to 20 °C) |



CONTEGA[®] PV

Render Connection Strip

- ✓ Joins airtight render to air barriers such as INTELLO[®] PLUS
- ✓ Provides strong and durable plaster and render joints
- ✓ Airtight connect for the life of the building
- ✓ Fleece side can be plastered or rendered in place

CONTEGA[®] PV is a connection strip allowing airtight connections between interior masonry building surfaces and common penetrations. The polypropylene mesh is designed to be embedded in plaster or render, whilst the adhesive will adhere to all common building materials.

TECHNICAL DATA

| | |
|------------------------------------|----------------------------|
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | Above -10 °C |
| UV stability and outdoor exposure: | Indoor use only |
| Storage: | Cool and dry |

| ID CODE | LENGTH | WIDTH | QTY |
|---------|--------|--------|-----|
| 15840 | 15 m | 200 mm | 1 |



TESCON® Vana

Multi-Purpose Adhesive Tape

- ✓ Long term durability
- ✓ Provides an airtight connection for the life of the building
- ✓ Flexible to account for building movement over time
- ✓ Thin, highly pliable and easily formed into corners and shapes

TESCON® VANA is a multi-purpose adhesive tape that forms as essential part of an air barrier system. Made with polypropylene and acrylate, it provides a permanent airtight seal of overlaps in membranes and joins between smooth, non-mineral surfaces.

TECHNICAL DATA

| | |
|------------------------------------|----------------------------|
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | From -10 °C |
| UV stability and outdoor exposure: | Indoor use only |
| Storage: | Cool and dry |

| ID CODE | LENGTH | WIDTH | BACKING | QTY |
|---------|--------|-------|----------|-----------------------------|
| 12185 | 30 m | 60 mm | No split | 1 |
| 11365 | 30 m | 60 mm | No split | 20 <small>big pack*</small> |

TESCON® PROFIL

Corner Sealing Tape

- ✓ Specially designed for corner applications
- ✓ Three individual removable strips of release paper for accurate installation
- ✓ Flexible to account for building movement over time
- ✓ Thin, highly pliable and easily formed into corners and shapes

TESCON® PROFIL is a multi-purpose adhesive tape designed for corner applications and securing an airtight seal of junctions between membranes and window or door joinery. Made with polypropylene and acrylate, it provides a permanent airtight seal of overlaps in membranes and joins between smooth, non-mineral surfaces.

TECHNICAL DATA

| | |
|------------------------------------|----------------------------|
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | From -10 °C |
| UV stability and outdoor exposure: | Indoor use only |
| Storage: | Cool and dry |



| ID CODE | LENGTH | WIDTH | BACKING | QTY |
|---------|--------|-------|--------------------|-----------------------------|
| 12186 | 30 m | 60 mm | 12 / 23 / 25 split | 1 |
| 11398 | 30 m | 60 mm | 12 / 23 / 25 split | 20 <small>big pack*</small> |

*big pack product only sold per unit.



DUPLEX

Double Sided Tape

- ✓ Double sided tape for use as a bonding layer
- ✓ Strong adhesion and reinforced for maximum holding strength
- ✓ Can be applied to cold surfaces
- ✓ Thin and flexible for ease of application

DUPLEX is a double-sided fixing tape for connecting overlaps, end laps and other connections on membranes. It is an essential part of the install process of weather resistive and intelligent air barrier systems.

TECHNICAL DATA

| | |
|------------------------------------|--|
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | From -10 °C |
| UV stability and outdoor exposure: | Indoor and outdoor use without direct UV |
| Storage: | Cool and dry |

| ID CODE | LENGTH | WIDTH | QTY |
|----------|--------|-------|-----|
| 1AR03071 | 80 m | 25 mm | 1 |



TESCON® WS

Wet Seal Connection Tape

- ✓ Designed for wet seal connections between TESCON EXTONSEAL® and window & door joinery
- ✓ Can be used with silicone, polymer and polyurethane sealants
- ✓ Weathertight and airtight connection
- ✓ Tested and proven in Australia & New Zealand

TESCON® WS is a pure aluminium tape for wet seal connections to pro clima TESCON EXTONSEAL®. It forms an essential part of any weather resistive barrier system using wet seal around windows and doors.

TECHNICAL DATA

| | |
|---------------------------|-------------------|
| Carrier material: | Pure aluminium |
| Temperature resistance: | -40 °C to +130 °C |
| Installation temperature: | > -10 °C |
| Storage: | Cool and dry |

| ID CODE | LENGTH | WIDTH | QTY |
|---------|--------|-------|-----|
| 16849 | 30 m | 38 mm | 1 |



PRESSFIX

Pressing Tool for Adhesive Tapes



- ✓ Specialist tool for use on pro clima's adhesive products
- ✓ Ensures pressure sensitive adhesive is activated
- ✓ Creates a strong connection between tapes and the substrate
- ✓ Lightweight, malleable and easy to use



| ID CODE | LENGTH | WIDTH | QTY |
|---------|--------|-------|-----|
| 16134 | 105 mm | 80 mm | 1 |

PRESSFIX XL

Pressing Tool for SOLITEX EXTASANA ADHERO® (WRB)



- ✓ Specialist tool for use on SOLITEX EXTASANA ADHERO®
- ✓ Ensures pressure sensitive adhesive is activated
- ✓ Creates a strong connection between SOLITEX EXTASANA ADHERO® and the substrate
- ✓ Lightweight, malleable and easy to use



| ID CODE | LENGTH | WIDTH | QTY |
|----------|--------|--------|-----|
| 1AR01658 | 285 mm | 130 mm | 1 |



ORCON® CLASSIC

Multi-Purpose Liquid Adhesive



- ✓ Airtight sealing glue for bonding all pro clima products to any building material
- ✓ Provides a firm and durable elastic attachment
- ✓ Dries quickly and penetrates deep into the substrate
- ✓ Airtight connection for the life of the building

ORCON® Classic is a multi-purpose sealant which forms an essential part of your weather resistive or air barrier system. Made from copolymers, it maintains excellent elasticity once dry, for a secure and permanent airtight seal of overlaps between pliable membranes and other building materials.

| ID CODE | PACKAGING | WIDTH | EFFICIENCY/RANGE | QTY |
|---------|-----------|--------|------------------------------------|-----|
| 14899 | cartridge | 310 ml | bead 5 mm ~ 15m bead 8 mm ~ 6m | 1 |
| 14900 | sausage | 600 ml | bead 5 mm ~ 30m bead 8 mm ~ 12m | 1 |

TECHNICAL DATA

| | |
|---------------------------|----------------------------|
| Temperature resistance: | Permanent -20 °C to +80 °C |
| Installation temperature: | From -10 °C |
| Characteristics: | Very tensile |
| Storage: | > -20°C, cool and dry |



TESCON® PRIMER RP

Solvent-Free Primer

- ✓ Prepares porous substrates for application of the pro clima range of tapes
- ✓ No drying time required prior to application of tapes
- ✓ Deep penetration into the substrate with excellent hardening
- ✓ Solvent free & very high adhesion

TESCON® PRIMER RP is an acrylic copolymer designed to penetrate and impregnate the pores or porous substrates, to provide a suitable surface to bond pro clima tapes to.

| ID CODE | CONTENTS | APPLICATION WIDTH | EFFICIENCY/RANGE | QTY |
|----------|----------|-------------------|------------------|-----|
| 1AR00010 | 1000ml | 60 mm | ~75 m | 1 |
| | | 75 mm | ~60 m | 1 |
| | | 150 mm | ~30 m | 1 |

TECHNICAL DATA

| | |
|---------------------------|---------------------------------|
| Material: | Acrylic copolymer, solvent free |
| Installation temperature: | -10 °C to +45 °C |
| Temperature resistance: | -40 °C to +90 °C |
| Storage: | Cool and dry |

*big pack product only sold per unit.



INSTAABOX

Installation Box

- ✓ Designed to allow penetrations through an air barrier
- ✓ Rectangular shape allows flexibility for a wide range of penetrations
- ✓ Suitable for power points, pipes and cables
- ✓ Flexible and easy to work with

INSTAABOX can be used on all common air barriers, including INTELLO® PLUS, to provide an airtight seal around a range of penetrations. Made of polyethylene, it is a flexible and malleable product that is quick to install and easy to work with.

| ID CODE | LENGTH | WIDTH | QTY |
|---------|--------|--------|-----------------------------|
| 12181 | 320 mm | 190 mm | 5 |
| 13601 | 320 mm | 190 mm | 20 <small>big pack*</small> |

TECHNICAL DATA

| | |
|-------------------------|------------------------|
| Material: | Polyethylene, flexible |
| Temperature resistance: | -10 °C to +80 °C |
| Cable diameter: | Max. 20 mm |
| Depth: | 55 mm |



KAFLEX mono/duo

Cable Sealing Grommets

- ✓ Weather-resistant and airtight sealing grommets for 1 or 2 cable penetrations
- ✓ Suitable for penetrations in facades and roof linings
- ✓ Provides an airtight connection for the life of the building
- ✓ Made of EPDM, ensuring high flexibility and elasticity


KAFLEX is a cable sealing grommet made from EPDM with a factory bonded flange that self-seals around cables. It has excellent adhesion for secure and airtight seals where round cables penetrate membranes or smooth, non-mineral surfaces.

| PRODUCT | ID CODE | LENGTH | WIDTH | QTY |
|-------------|---------|--------|--------|-----------------------------|
| KAFLEX mono | 13628 | 145 mm | 145 mm | 5 |
| KAFLEX mono | 13629 | 145 mm | 145 mm | 30 <small>big pack*</small> |
| KAFLEX duo | 13631 | 145 mm | 145 mm | 30 <small>big pack*</small> |

TECHNICAL DATA

| | |
|------------------------------------|---|
| Temperature resistance: | Long term -40 °C to +150 °C (EPDM) |
| | Long term -40 °C to +90 °C (TESCON® VANA) |
| Installation temperature: | From -10 °C |
| UV stability and outdoor exposure: | Indoor/outdoor |
| Storage: | Cool and dry |

*big pack product only sold per unit.

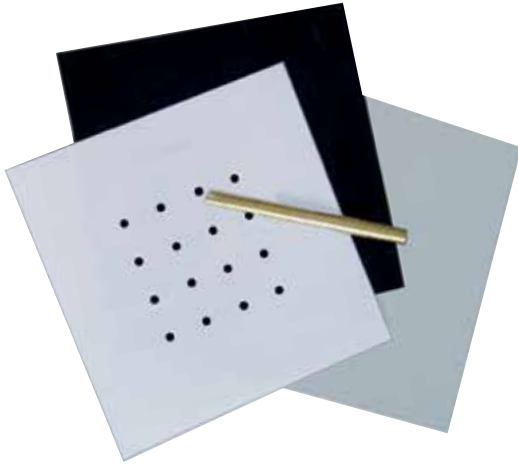

KAFLEX multi

Cable Sealing Grommets

- ✓ Weather-resistive and airtight sealing grommets for up to 16 cable penetrations
- ✓ Suitable for penetrations in facades and roof linings
- ✓ Provides an airtight connection for the life of the building
- ✓ Made of EPDM, ensuring high flexibility and elasticity

KAFLEX is a cable sealing grommet made from EPDM with a factory bonded flange that self-seals around cables. It has excellent adhesion for secure and airtight seals where round cables penetrate membranes or smooth, non-mineral surfaces.

TECHNICAL DATA

| | |
|------------------------------------|------------------------|
| Temperature resistance: | From -40 °C to +120 °C |
| Installation temperature: | Over -10 °C |
| UV stability and outdoor exposure: | 180 days |
| Storage: | Cool and dry |

| ID CODE | LENGTH | WIDTH | QTY |
|---------|--------|--------|-----------------------------|
| 13630 | 140 mm | 140 mm | 2 |
| 13634 | 140 mm | 140 mm | 20 <small>big pack*</small> |



KAFLEX post

Sealing Patch for Already Installed Cables

- ✓ Create airtight seals around cables that are already in place
- ✓ Simple, fast and secure application
- ✓ Airtight for the life of the building
- ✓ Extremely flexible and elastic


KAFLEX is a sealing patch used to provide a durable seal to an installed cable that is already connected. It can be used in conjunction with internal and external membranes.

TECHNICAL DATA

| | |
|---------------------------|-----------------------------|
| Material: | Special fleece made from PP |
| Release paper: | Siliconized paper |
| Temperature resistance: | Long term -40 °C to +90 °C |
| Installation temperature: | From -10 °C |

| ID CODE | LENGTH | WIDTH | QTY |
|---------|--------|--------|-----------------------------|
| 13635 | 140 mm | 140 mm | 5 |
| 13636 | 140 mm | 140 mm | 20 <small>big pack*</small> |

*big pack product only sold per unit.

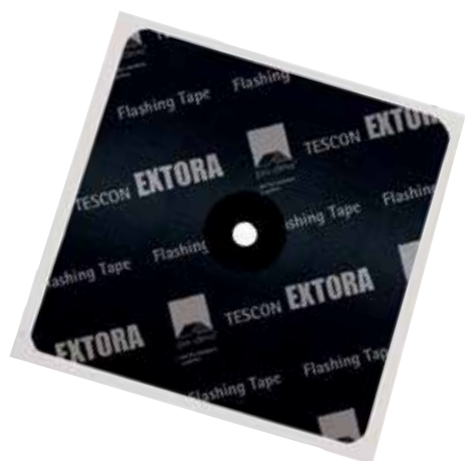

ROFLEX 20

Sealing Grommets for Pipes

- ✓ Weather-resistive and airtight sealing grommets for pipe penetrations
- ✓ Suitable for penetrations in facades and roof linings
- ✓ Provides an airtight connection for the life of the building
- ✓ Made of EPDM, ensuring high flexibility and elasticity

ROFLEX is a pipe sealing grommet made from EPDM with a factory bonded flange that seals around pipes when tapes to a membrane. It has excellent adhesion for secure and airtight seals where pipes penetrate membranes or smooth, non-mineral surfaces.

| ID CODE | LENGTH | WIDTH | QTY |
|---------|--------|--------|-----------------------------|
| 13605 | 145 mm | 145 mm | 5 |
| 13606 | 145 mm | 145 mm | 30 <small>big pack*</small> |

TECHNICAL DATA

| | |
|------------------------------------|--------------------------|
| Temperature resistance: | -40 °C to +120 °C (EPDM) |
| Installation temperature: | Over -10 °C |
| UV stability and outdoor exposure: | 180 days |
| Storage: | Cool and dry |



ROFLEX 30/50/100/150/200/250/300

Sealing Grommets for Pipes

- ✓ Ideal for sealing pipe penetrations
- ✓ High-quality EPDM, extremely flexible and elastic
- ✓ Excellent UV exposure – up to 180 days
- ✓ Long-term durability

| PRODUCT | ID CODE | LENGTH | WIDTH | FOR DIAMETER Ø | QTY |
|------------|---------|--------|--------|----------------|-----------------------------|
| ROFLEX 30 | 16704 | 140 mm | 140 mm | 30-50 mm | 2 |
| ROFLEX 30 | 16695 | 140 mm | 140 mm | 30-50 mm | 20 <small>big pack*</small> |
| ROFLEX 50 | 13608 | 140 mm | 140 mm | 50-90 mm | 2 |
| ROFLEX 50 | 13609 | 140 mm | 140 mm | 50-90 mm | 20 <small>big pack*</small> |
| ROFLEX 100 | 13610 | 200 mm | 200 mm | 100-120 mm | 2 |
| ROFLEX 100 | 13613 | 200 mm | 200 mm | 100-120 mm | 20 <small>big pack*</small> |
| ROFLEX 150 | 13614 | 250 mm | 250 mm | 120-170 mm | 2 |
| ROFLEX 150 | 13612 | 250 mm | 250 mm | 120-170 mm | 20 <small>big pack*</small> |
| ROFLEX 200 | 13615 | 300 mm | 300 mm | 170-220 mm | 2 |
| ROFLEX 200 | 13616 | 300 mm | 300 mm | 170-220 mm | 20 <small>big pack*</small> |
| ROFLEX 250 | 13617 | 450 mm | 450 mm | 220-270 mm | 2 |
| ROFLEX 300 | 13618 | 500 mm | 500 mm | 270-320 mm | 2 |

*big pack product only sold per unit.

ROFLEX 30 to 300 range are sealing grommets ideally suited for quick and permanent airtight sealing of penetrations of pipes. It is made of strong and flexible EPDM and can be used inside to seal penetrations through the airtightness layer as well as outside for penetrations in the roof and wall underlays. Pipes can be pulled and pushed without damaging the airtightness layer.

TECHNICAL DATA

| | |
|------------------------------------|------------------------|
| Temperature resistance: | From -40 °C to +150 °C |
| Installation temperature: | Over -10 °C |
| UV stability and outdoor exposure: | 180 days |
| Storage: | Cool and dry |

100 YEAR DURABILITY

Permanent airtightness with pro clima!



TESCON **EXTORA**[®]

TESCON **vana**



TESCON **EXTORA**[®] PROFIL



TESCON **PROFIL**



- ✓ Reliable adhesion, tested for 100 years
- ✓ Independently confirmed
- ✓ Significantly exceeds minimum requirements

To find out more visit: www.proclima.com.au/warranties



We are proud to have our products regularly tested and certified. We have a range of certifications, some of which are featured below. For more information visit: www.proclima.com.au/certifications

AU



GER



UK



EU



IRL



NZ



GLOBAL



Pricing

RTP - Recommended Trade Price

| SOLITEX EXTASANA® | ID CODE | LENGTH | WIDTH | COVERAGE | RTP | UNIT | PAGE |
|-------------------------|---------|--------|--------|--------------------|----------|------|------|
| SOLITEX EXTASANA 1.5 m | 13547 | 36.5 m | 1.5 m | 55 m ² | \$226.50 | Roll | 06 |
| SOLITEX EXTASANA 2.74 m | 13323 | 36.5 m | 2.74 m | 100 m ² | \$430.47 | Roll | 06 |

| SOLITEX EXTASANA ADHERO® | ID CODE | LENGTH | WIDTH | COVERAGE | RTP | UNIT | PAGE |
|-------------------------------|----------|--------|-------|-------------------|----------|------|------|
| SOLITEX EXTASANA ADHERO 1.5 m | 1AR01968 | 30 m | 1.5 m | 45 m ² | \$770.39 | Roll | 08 |

| SOLITEX MENTO® | ID CODE | LENGTH | WIDTH | COVERAGE | RTP | UNIT | PAGE |
|----------------------------------|----------|--------|-------|--------------------|------------|------|------|
| SOLITEX MENTO PLUS 1.5 m | 1AR02396 | 50 m | 1.5 m | 75 m ² | \$458.25 | Roll | 10 |
| SOLITEX MENTO PLUS 3 m | 1AR02494 | 50 m | 3.0 m | 150 m ² | \$958.15 | Roll | 10 |
| SOLITEX MENTO PLUS connect 1.5 m | 1AR02493 | 50 m | 1.5 m | 75 m ² | \$518.02 | Roll | 10 |
| SOLITEX MENTO 5000 1.5 m | 1AR01868 | 50 m | 1.5 m | 75 m ² | \$531.30 | Roll | 12 |
| SOLITEX MENTO 5000 3 m | 1AR01870 | 50 m | 3.0 m | 150 m ² | \$1,097.01 | Roll | 12 |
| SOLITEX MENTO 5000 connect 1.5 m | 1AR02283 | 50 m | 1.5 m | 75 m ² | \$611.00 | Roll | 12 |
| SOLITEX MENTO ULTRA 1.5 m | 1AR00629 | 50 m | 1.5 m | 75 m ² | \$632.50 | Roll | 13 |

| SOLITEX® UM | ID CODE | LENGTH | WIDTH | COVERAGE | RTP | UNIT | PAGE |
|--------------------------|---------|--------|-------|---------------------|----------|------|------|
| SOLITEX UM connect 1.5 m | 13598 | 25 m | 1.5 m | 37.5 m ² | \$799.61 | Roll | 14 |

| DA | ID CODE | LENGTH | WIDTH | COVERAGE | RTP | UNIT | PAGE |
|----------|---------|--------|-------|-------------------|----------|------|------|
| DA 1.5 m | 10098 | 50 m | 1.5 m | 75 m ² | \$506.00 | Roll | 16 |

| INTELLO® PLUS | ID CODE | LENGTH | WIDTH | COVERAGE | RTP | UNIT | PAGE |
|-----------------------------------|----------|--------|--------|--------------------|------------|------|------|
| INTELLO PLUS 1.5 m | 11367 | 50 m | 1.5 m | 75 m ² | \$577.79 | Roll | 18 |
| INTELLO PLUS 3 m | 13590 | 50 m | 3.0 m | 150 m ² | \$1,208.10 | Roll | 18 |
| INTELLO PLUS conneX 300 mm x 50 m | 1AR02326 | 50 m | 0.33 m | 15 m ² | \$162.80 | Roll | 20 |
| INTELLO PLUS conneX 900 mm x 50 m | 1AR03352 | 50 m | 0.90 m | 45 m ² | \$490.05 | Roll | 20 |

| AEROSANA® VISCONN | ID CODE | QTY | RTP | UNIT | PAGE |
|-------------------------|----------|------|----------|--------|------|
| AEROSANA VISCONN (10 L) | 1AR01106 | 10 L | \$350.41 | Bucket | 21 |

| TESCON EXTORA® | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
|------------------------------|---------|--------|--------|---------|------------|------|------|
| TESCON EXTORA 60 mm | 13206 | 30 m | 60 mm | 10 | \$68.56 | Roll | 22 |
| TESCON EXTORA 60 mm Big Pack | 13486 | 30 m | 60 mm | 20 | \$1,243.24 | Box | 22 |
| TESCON EXTORA 100 mm | 13280 | 30 m | 100 mm | 3 | \$113.15 | Roll | 22 |
| TESCON EXTORA 150 mm | 14891 | 30 m | 150 mm | 2 | \$172.04 | Roll | 22 |
| TESCON EXTORA 200 mm | 14892 | 30 m | 200 mm | 1 | \$229.79 | Roll | 22 |

| TESCON EXTORA® PROFIL | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
|-------------------------------|---------|--------|-------|---------|------------|------|------|
| TESCON EXTORA PROFIL | 15050 | 30 m | 60 mm | 5 | \$83.68 | Roll | 22 |
| TESCON EXTORA PROFIL Big Pack | 15236 | 30 m | 60 mm | 20 | \$1,593.90 | Box | 22 |

| TESCON EXTOSEAL® | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
|------------------------|---------|--------|--------|---------|----------|------|------|
| TESCON EXTOSEAL 150 mm | 14152 | 20 m | 150 mm | 2 | \$164.70 | Roll | 23 |
| TESCON EXTOSEAL 200 mm | 14156 | 20 m | 200 mm | 2 | \$220.49 | Roll | 23 |

| TESCON® NAIDECK mono patch | ID CODE | SIZE | PATCHES | QTY/BOX | RTP | UNIT | PAGE |
|----------------------------|----------|------------|---------|---------|----------|------|------|
| TESCON NAIDECK mono patch | 1AR02157 | 80 x 60 mm | 300 | 1 | \$201.25 | Roll | 23 |

| TESCON® NAIDECK | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
|-------------------------|---------|--------|-------|---------|------------|------|------|
| TESCON NAIDECK | 13599 | 20 m | 50 mm | 6 | \$52.05 | Roll | 24 |
| TESCON NAIDECK Big Pack | 13600 | 20 m | 50 mm | 24 | \$1,096.63 | Box | 24 |

| CONTEGA® EXO | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
|--------------------|----------|--------|--------|---------|----------|------|------|
| CONTEGA EXO 85 mm | 15844 | 30 m | 85 mm | 8 | \$89.82 | Roll | 24 |
| CONTEGA EXO 120 mm | 1AR01266 | 30 m | 120 mm | 8 | \$118.91 | Roll | 24 |

| CONTEGA® IQ | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
|--------------------|---------|--------|-------|---------|----------|------|------|
| CONTEGA IQ masonry | 14897 | 30 m | 90 mm | 8 | \$189.75 | Roll | 25 |
| CONTEGA IQ timber | 14896 | 30 m | 90 mm | 8 | \$215.05 | Roll | 25 |

| CONTEGA® PV | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
|-------------|---------|--------|--------|---------|----------|------|------|
| CONTEGA PV | 15840 | 15 m | 200 mm | 4 | \$123.34 | Roll | 25 |

| TESCON® VANA | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
|---|----------|--------------|----------|---------|------------|--------|------|
| TESCON VANA 60 mm | 12185 | 30 m | 60 mm | 10 | \$68.56 | Roll | 26 |
| TESCON VANA 60 mm Big Pack | 11365 | 30 m | 60 mm | 20 | \$1,243.24 | Box | 26 |
| TESCON® PROFIL | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| TESCON PROFIL (5 per box) | 12186 | 30 m | 60 mm | 5 | \$83.68 | Roll | 26 |
| TESCON PROFIL Big Pack (20 per box) | 11398 | 30 m | 60 mm | 20 | \$1,593.90 | Box | 26 |
| DUPLEX | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| DUPLEX | 1AR03071 | 80 m | 25 mm | 10 | \$84.14 | Roll | 27 |
| TESCON® WS | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| TESCON WS | 16849 | 30 m | 38 mm | 10 | \$44.28 | Roll | 27 |
| PRESSFIX | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| PRESSFIX | 16134 | 105 mm | 80 mm | 1 | \$1.00 | Piece | 28 |
| PRESSFIX XL | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| PRESSFIX XL | 1AR01658 | 285 mm | 130 mm | 1 | \$10.00 | Piece | 28 |
| ORCON® CLASSIC | ID CODE | PACKAGING | VOLUME | QTY/BOX | RTP | UNIT | PAGE |
| ORCON 310 | 14899 | Cartridge | 310 ml | 20 | \$23.28 | Piece | 29 |
| ORCON 600 | 14900 | Sausage | 600 ml | 12 | \$33.90 | Piece | 29 |
| TESCON® PRIMER RP | ID CODE | PACKAGING | VOLUME | QTY/BOX | RTP | UNIT | PAGE |
| TESCON PRIMER RP | 11449 | Bottle | 1 L | 6 | \$88.55 | Bottle | 29 |
| INSTAABOX | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| INSTAABOX | 12181 | 320 mm | 190 mm | 5 | \$55.79 | Box | 30 |
| INSTAABOX Big Pack | 13601 | 320 mm | 190 mm | 20 | \$199.24 | Box | 30 |
| KAFLEX mono/duo | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| KAFLEX mono | 13628 | 145 mm | 145 mm | 5 | \$47.82 | Box | 30 |
| KAFLEX mono Big Pack | 13629 | 145 mm | 145 mm | 30 | \$217.83 | Box | 30 |
| KAFLEX duo Big Pack | 13631 | 145 mm | 145 mm | 30 | \$217.83 | Box | 30 |
| KAFLEX multi | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| KAFLEX multi | 13630 | 140 mm | 140 mm | 2 | \$69.07 | Box | 31 |
| KAFLEX multi Big Pack | 13634 | 140 mm | 140 mm | 20 | \$520.67 | Box | 31 |
| KAFLEX post | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| KAFLEX post | 13635 | 140 mm | 140 mm | 5 | \$56.45 | Box | 31 |
| KAFLEX post Big Pack | 13636 | 140 mm | 140 mm | 20 | \$170.02 | Box | 31 |
| ROFLEX 20 | ID CODE | LENGTH/WIDTH | DIAMETER | QTY/BOX | RTP | UNIT | PAGE |
| ROFLEX 20 (15-30 mm diameter) | 13605 | 145 mm | 15-30 mm | 5 | \$55.79 | Box | 32 |
| ROFLEX 20 Big Pack (15-30 mm diameter) | 13606 | 145 mm | 15-30 mm | 30 | \$243.07 | Box | 32 |
| ROFLEX | ID CODE | LENGTH | WIDTH | QTY/BOX | RTP | UNIT | PAGE |
| ROFLEX 30 (30-50 mm diameter) | 16704 | 140 mm | 140 mm | 2 | \$31.88 | Box | 32 |
| ROFLEX 30 Big Pack (30-50 mm diameter) | 16695 | 140 mm | 140 mm | 20 | \$205.88 | Box | 32 |
| ROFLEX 50 (50-90 mm diameter) | 13608 | 140 mm | 140 mm | 2 | \$31.88 | Box | 32 |
| ROFLEX 50 Big Pack (50-90 mm diameter) | 13609 | 140 mm | 140 mm | 20 | \$205.88 | Box | 32 |
| ROFLEX 100 (100-120 mm diameter) | 13610 | 200 mm | 200 mm | 2 | \$37.19 | Box | 32 |
| ROFLEX 100 Big Pack (100-120 mm diameter) | 13613 | 200 mm | 200 mm | 20 | \$247.05 | Box | 32 |
| ROFLEX 150 (120-170 mm diameter) | 13614 | 250 mm | 250 mm | 2 | \$50.47 | Box | 32 |
| ROFLEX 150 Big Pack (120-170 mm diameter) | 13612 | 250 mm | 250 mm | 20 | \$318.78 | Box | 32 |
| ROFLEX 200 (170-200 mm diameter) | 13615 | 300 mm | 300 mm | 2 | \$61.10 | Box | 32 |
| ROFLEX 200 Big Pack (170-200 mm diameter) | 13616 | 300 mm | 300 mm | 20 | \$398.48 | Box | 32 |
| ROFLEX 250 (220-270 mm diameter) | 13617 | 450 mm | 450 mm | 2 | \$90.32 | Box | 32 |
| ROFLEX 300 (270-300 mm diameter) | 13618 | 500 mm | 500 mm | 2 | \$111.57 | Box | 32 |

NOTES

RTP - Recommended Trade Price | Prices are in AUD and exclude GST. | Prices are valid from 01.09.2022. All previous price lists are invalid. | Pricing is a non-binding offer and errors are excepted. | Terms and conditions apply.



pro clima AUS

Purchase pro clima products from one of our distributors across Australia!



2022-09-01

Pro Clima Australia Pty Ltd
Web: www.proclima.com.au
Email: welcome@proclima.com.au
Phone: 1800 PRO CLIMA (776 254)

